



1 General Information / Overview

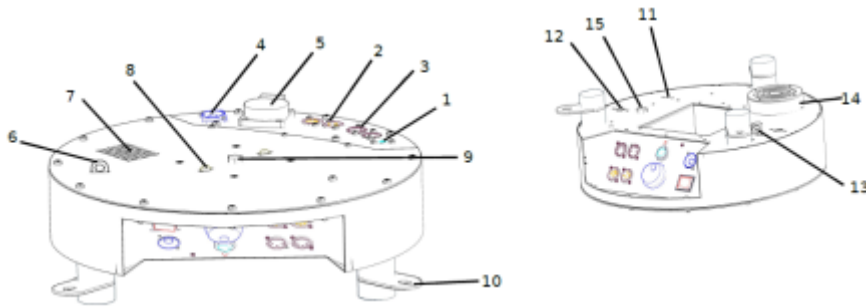

1. Air pressure sensor, **important: keep free for safe use!**
2. Neutrik 3pole and 5pole XLR DMX Input
3. Neutrik 3pole and 5pole XLR DMX Output
4. PowerCON output
5. SCHUKO® socket
6. Safety wire point for used fixture
7. Fan cover, **important: keep free for safe use!**
8. 2x Camlock for used fixture
9. M10 Screws for used fixture
10. 3x holders for anchors
11. Air pressure sensor, **important: keep free for safe use!**
2x Camlock for Hanging Kit (optional)
12. Safety wire point for Hanging Kit (optional)
13. Dust filter
14. 2x M10 Screws for Omega Clamps fixation

1.1 Details Control Panel

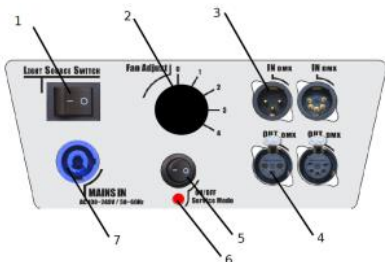


1. Switch On/Off for Output
2. Fan Switch, 4 Levels
3. DMX Input: Neutrik 3-pol. and 5-pol. XLR
4. DMX Output: Neutrik 3-pol. and 5-pol. XLR
5. Switch On/Off Air pressure Sensor
6. LED pressure Sensor (On: LED flashes)
7. Mains In (PowerCON)

2 Technical Data

| | |
|------------------------------|--|
| Voltage Input | 110-240 V AC, 50 Hz |
| Voltage Output | 110-240 V AC, 50 Hz, max 16 A |
| Dimensions Base /LxWxH/ | 403x403x151 mm |
| Total Dimensions | 403x403x610 mm |
| Weight | 7 kg |
| Protection Rating base only | IP 20 |
| Protection Rating with Cover | IP 44 |
| DMX | 5/3 pin XLR: (+) = pin 3; (-) = pin 2; (Ground) = pin 1 |

2.1 Dimensions

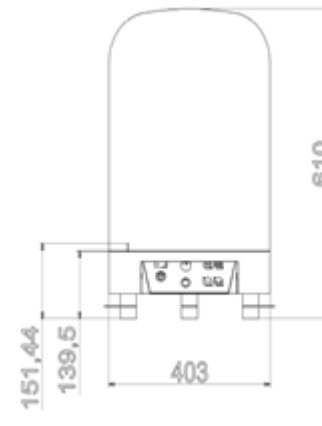

Air Dome 400 is suited for:

- impression 90 / 120 RZ
- impression X1, X4, X4 S
- Volkslicht (Zoom)
- Volkslicht Spot

3 Application Notes



Outdoor use only with the rain protection cover (part of the delivery package)

Positions (1), (7) and (11) –see 1 General Information / Overview, must kept free under any circumstances in order to secure a safe and smooth operation!

4 Parts of Delivery

| | |
|------------------|---|
| Base |  |
| Rain Cover |  |
| PowerCON Cable |  |
| PowerCON Adapter |  |
| Dust Filter |  |

5 Optional Accessories

| | |
|-------------|---|
| Hanging Kit |  |
|-------------|---|



GLP German Light Products GmbH

Industriestr. 2, 76307 Karlsbad, Germany

Tel: +49 (0)72 48 / 927 19 - 0, Fax: -30,

E-Mail: info@glp.de, Internet: www.glp.de

Product Description

AIR DOME 400

Weather protection for smaller fixtures



Version 1.1



support@glp.de
www.glp.de